MATERIAL

1) 1.50 x 1.25 ADA STAIR TOP CAP
2) 1.25" SQ. X .125" POST
3) .75" SQ. X .0625" PICKETS
4) 1.25" X .75" X .125" CHANNEL
5) 3.5" SLEEVE HOLE OR CORE DRILL HOLE FILLED WITH NON SHRINK NON METTALIC GROUT.
6) 1.50" ROUND TUBE

NOTES:
1) MATERIAL: EXTRUDED ALUMINUM GRADE 6000 SERIES - T5 OR T-6 AS AVAILABLE.

2) FABRICATION: ALL RAIL SECTIONS TO BE WELDED UNITES IN THE LONGEST LENGTHS PRACTICAL TO FACILITATE HANDLING AND FINISHING CONDITIONS.

3) FINISH: STANDARD COLOR

4) DUE TO VARIATIONS IN MATERIALS AND FABRICATION, A REASONABLE DEGREE OF VARIATION CAN BE EXPECTED WITH REGARD TO SPLICE JOINTS.

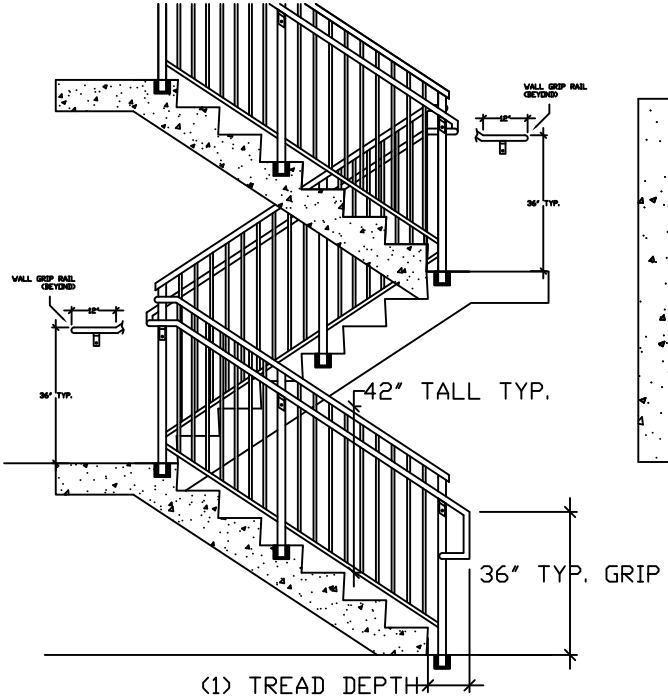

TYPICAL STAIR ELEVATION
N.T.S.

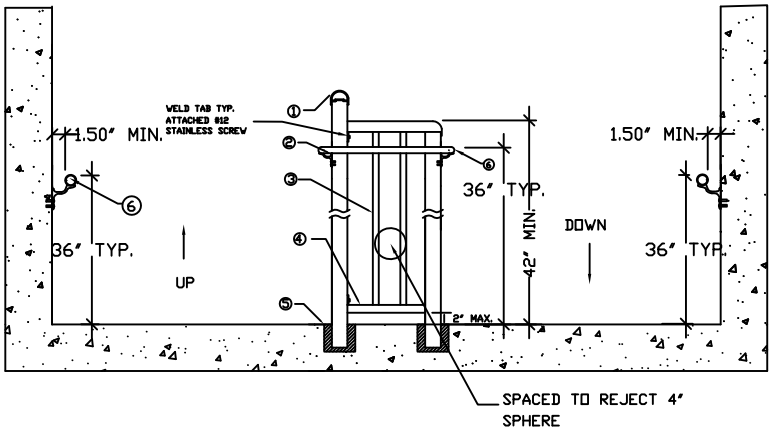

TYPICAL STAIR THRU SECTION
N.T.S.

ELITE CUSTOM RAILING INC.	
E-S1 RAILING SYSTEM	
DATE: 05-04-06	TYP. STAIR RAILING

ELITE CUSTOM RAILINGS INC.
DAYTONA FL. (386) 257-0191
ALUMINUM RAILING SYSTEM
E-S1